

Wireless

3500A Portable Radio Communications Test Set

AEROFLEX
A passion for performance.



New P25 Operation

Instantly Analyze Radio Systems Problems with Critical RF and Audio Tests Available at Your Fingertips

Featuring

- 2 MHz - 1 GHz operation
- AM/FM/P25 transmitter and receiver tests
- Spectrum analyzer with < -136 dBm noise floor
- Tracking generator
- Oscilloscope
- Save/Recall user setups
- Antenna and cable tests

The Aeroflex 3500A, the First Truly Rugged, Portable Radio Test Set

With the latest in portability, battery life and performance, the Aeroflex 3500A builds upon Aeroflex's expertise in developing portable radio communications test sets with exclusive features and affordability that are destined to set a new standard in portable radio test sets. Designed to meet the needs of a multitude of radio tests, the 3500A provides fast, reliable measurements of the radio's transmitter and receiver parameters. With the additional capability to perform quick testing of antennas and cables, the 3500A provides the most complete portable test solution available to quickly isolate problems and assess performance of the radio, cable and antenna systems. With the P25 option, the 3500A goes even further, providing you the tools to quickly check your P25 repeater, mobile, or hand-held radio. In addition, the tracking generator gives you the ability to re-tune your antenna duplexer located at your remote repeater sites.

Portable and Rugged

- Easy portability - weighs less than 8 lbs. (3.6 kg)
- Rugged construction - solid magnesium alloy weatherproof case
- -20° to $+55^{\circ}$ C operating temperature range
- 5 hour battery life


Aeroflex engineers designed the 3500A from the ground up to be portable and rugged, weighing in at less than 8 lbs. (3.6 kg) including the battery. It has a solid magnesium alloy weatherproof case, an operating temperature range of -20° to $+55^{\circ}$ C, and rugged construction specifications (Mil-PRF-28800A) for humidity, altitude, shock, and vibration. The battery gives the user 5 hours of operation and can be fully re-charged and ready to operate in only 4 hours.

Radio Installation Failures

- Handset and antenna allow over the air "Talk Test"
- RSSI meter
- RF Error meter
- Modulation measurements
- Audio frequency counter
- Spectrum analyzer
- Audio frequency oscilloscope

For the very latest specifications visit www.aeroflex.com

We designed the 3500A so that you could use it for quick installed radio testing and efficiently find radio failures. The 3500A is light-weight and perfect for hand-held testing. There is no need to connect to the radio under test, simply connect the supplied antenna, key up the radio and then measure the radio parameters over-the-air. A push-to-talk button on the handset controls whether your 3500A is transmitting or receiving. The Duplex test screen, shown below, is ideal for making quick transmitter and receiver measurements on an installed radio system.

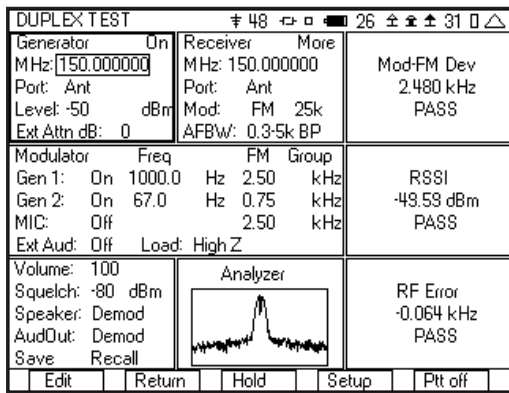


Duplex Test Screen

Bench Top Testing

- RF power
- RF frequency error
- AM modulation/FM deviation
- Audio frequency counter
- Receive Signal Strength Indicator (RSSI)
- DCS encode/decode
- DTMF encode/decode
- Distortion meter
- SINAD/sensitivity
- Spectrum analyzer
- Audio frequency oscilloscope
- Frequency find
- Audio level meter
- Pass/Fail limits


In addition to performing over the air measurements, the 3500A includes the capability to perform bench top type testing on a radio. All radio parameters including power, frequency error, modulation accuracy, receiver sensitivity and audio performance are easily accessed and tested with the 3500A.

If the Receiver Test is selected, the 3500A operates as a signal generator, enabling the testing of the receiver portion of the radio. Audio SINAD, distortion and frequency are among the tests that can be performed on the radio's receiver. With two internal generators that can be used as modulation sources, the 3500A can modulate the carrier with both a test tone and a squelch tone. Alternatively, the internal generators can generate both a test tone and DCS, enabling the testing of mobiles requiring a digitally coded squelch.

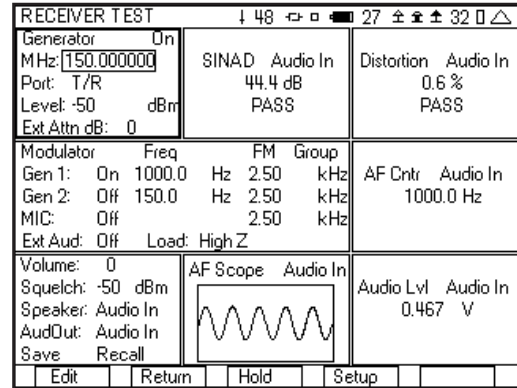


Receiver Test Screen

The Transmitter Test screen operates as a signal analyzer, measuring the parameters associated with the transmit portion of the radio being tested. Included in this screen are measurements of the modulation, the RF power, and RF frequency error. The frequency of sub-audible tones can also be measured by using the 0.3k LP filter and audio frequency counter.

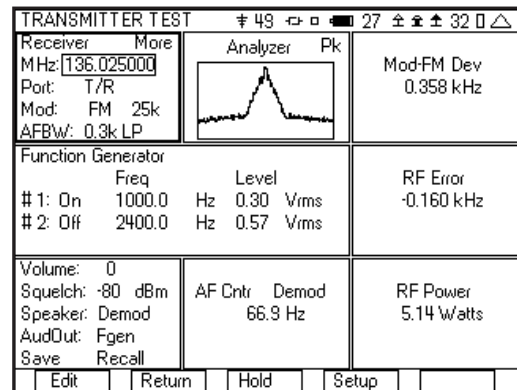

Transmitter Test Screen


Many of the meters can be "zoomed" into for additional setup, including programming the number of values to average and the pass/fail limits. The zoomed in meters also include bar graphs for a visual indication of the measurement.

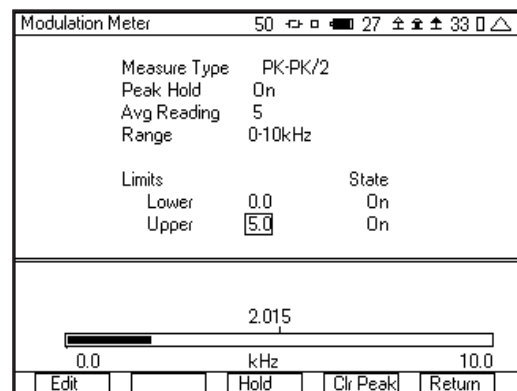

Modulation Meter

Any of the test screens can be easily configured with the meters that are needed according to the type of tests that the user wants to

perform by selecting the meters from the setup screen. Users can quickly define the "look" of the instrument by configuring the way the meters are displayed on the screen.

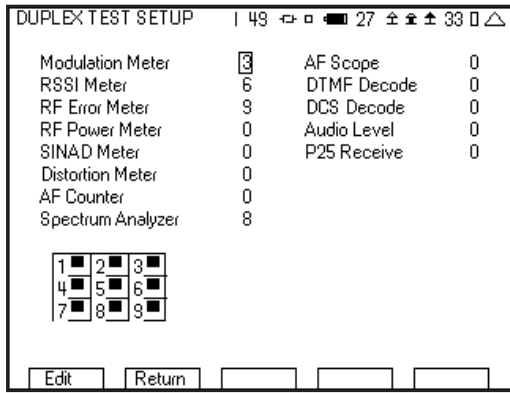


Duplex Test Setup Screen

Isolate Cable and Antenna Problems

Since many radio faults in an installed radio system lie in the cabling and/or antenna and not with the radio, the 3500A includes the capability to measure the VSWR or return loss of an antenna and the loss or distance to fault of a cable. By isolating the problem to the cable, connector or antenna you can avoid returning good radios to the depot or manufacturer for repair, thus, avoiding radio system downtime. The ANT-CABLE Test screen provides the user with the option to display:


- VSWR versus frequency
- Return loss versus frequency
- Cable loss versus frequency
- Return loss versus feet

The display of VSWR or Return Loss (RL) versus frequency is valuable for observing the performance of an antenna.

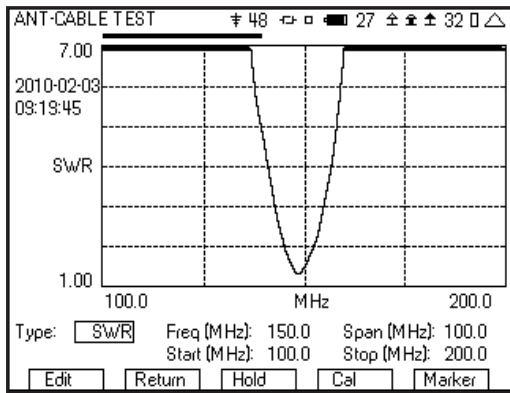

VSWR of a VHF Antenna

The display of return loss versus feet is descriptive of the characteristics of a cable, illustrating to the user the precise location of faults (DTF). For example, the following illustrates a cable that has minor faults with the location of marker 1 and 2 at the faults and marker 3 at the end of the cable.

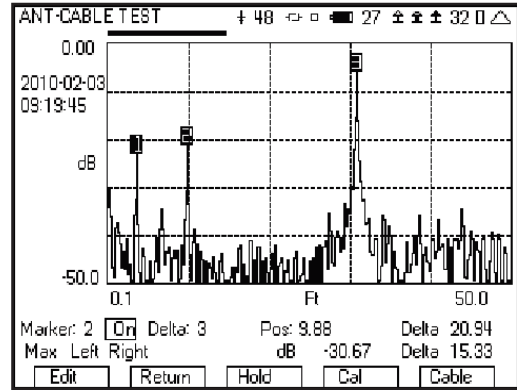


Distance to Fault screen

Up to three markers can be enabled for use in analyzing the graphical data that is acquired on the SWR test screen. The markers provide the user with information on the precise return location for DTF mode or the exact VSWR at a given frequency for SWR mode. A delta function, associated with the markers, is also available in order to show the difference in VSWR and frequency, or return loss and feet, between two of the markers.

Save/Recall Features

The 3500A allows users to configure the test setup and then save these setups internally for future use. This feature allows fast testing on radios that require constant testing, base station verification and for testing a large number of the same radio.

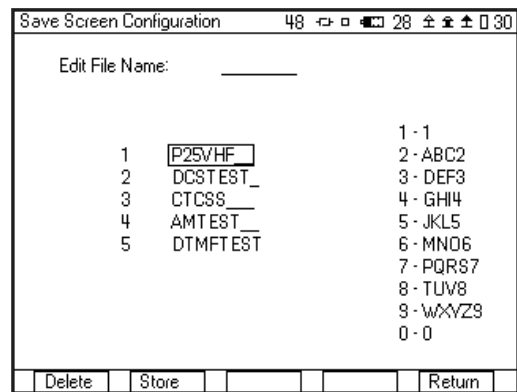


Save Screen

Spectrum Analyzer (35XXOPT01)

- Noise floor < -136 dBm
- Spans from 10 kHz to 5 MHz
- Effective resolution bandwidths down to 19 Hz
- Peak hold
- Average function

Option 35XXOPT01 is an FFT based spectrum analyzer. An FFT analyzer uses a snapshot of the incoming RF signal that is within the selected span and converts it to a frequency spectrum. The advantage of using this method is that the spectrum is converted from one set of data and not from a sweep where the RF signal may have changed from the start of the frequency sweep to the finish. The noise floor

of the spectrum analyzer is < -136 dBm in the 10 kHz span. The 3500A analyzer has a span width that ranges from 10 kHz to 5 MHz with an effective resolution bandwidth as narrow as 19 Hz. A marker function includes the capability of measuring the power within a particular bandwidth and at a specified offset from the center frequency. The 3500A Spectrum Analyzer can be accessed from the Transmitter Test screen, the Duplex Test screen, and as a stand-alone spectrum analyzer.

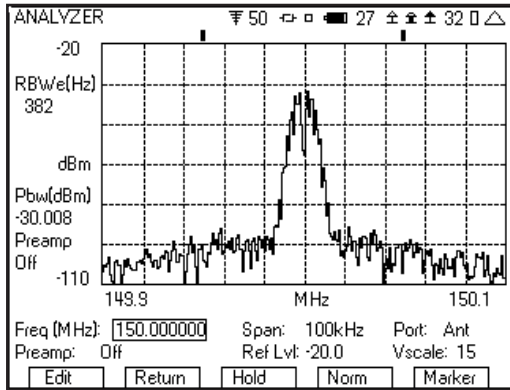


Spectrum Analyzer Option

Oscilloscope (35XXOPT02)

- Horizontal range of 50 ms/Div to 0.1 Sec/Div
- Two markers
- Audio bandwidth

With the oscilloscope option, we can display external audio or the demodulated audio of a received signal. The oscilloscope features 2 markers and a horizontal range of 50 mS/Div to 0.1 Sec/Div, sufficient for observing and analyzing audio signals. The oscilloscope is available from the Duplex, Transmitter, or Receiver Test screens for use during any type of testing.

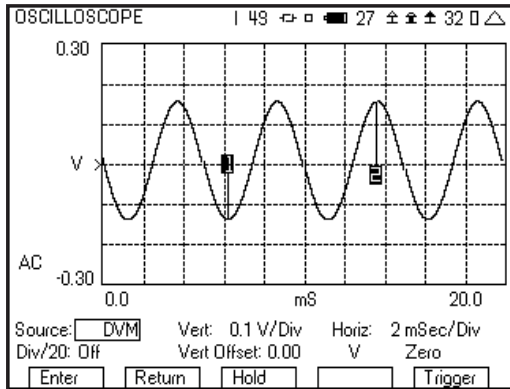


Oscilloscope Option

P25 Test (35XXOPT07)

- Modulation Fidelity, Deviation, and Frequency error meters
- Transmit BER meter
- Signal power meter
- Transmit standard 1011 Hz, O.153, and calibration patterns

The 3500A P25 option gives you the capability to test P25 mobiles,

hand-helds, repeaters and base stations. With this option, you can measure Modulation fidelity, deviation and frequency error and transmit standard patterns as specified by TIA-102.CAAA-C. This function becomes part of the Duplex, Transmitter or Receiver testing screens when this option is installed.

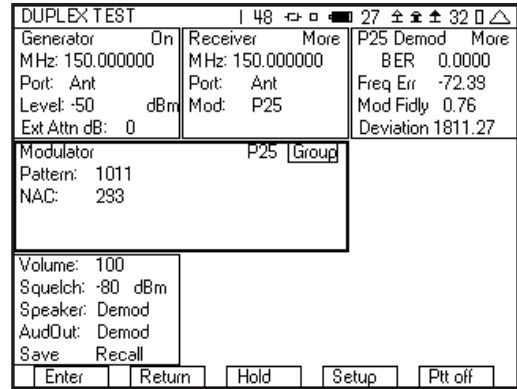


P25 Option

Tracking Generator (35XXOPT08)

- Spans from 10 kHz to full span
- 2 markers for pinpointing level of signal
- Output level adjustable from 0 to -60 dB (relative to maximum output of 3500A)

This option is totally software based and is upgradable to units that are already in the field. This option was designed specifically for aligning duplexers and filters.

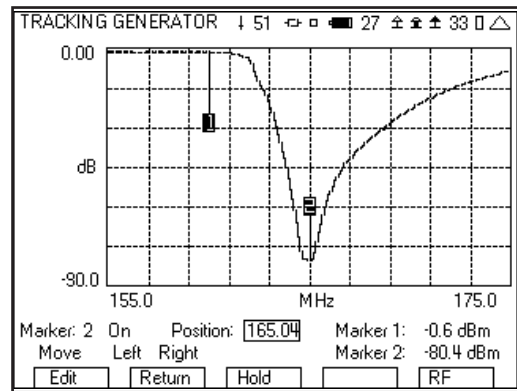

Tracking Generator

SPECIFICATION

RF SIGNAL GENERATOR

FREQUENCY

Range

2 MHz to 1 GHz

Resolution

1 Hz

OUTPUT LEVEL

Range

T/R port: -50 to -120 dBm/707.11 μ V to 0.22 μ V

ANT port: -30 to -90 dBm/7071.07 μ V to 7.07 μ V

SWR port: -5 to -65 dBm/125743.3 μ V to 125.7 μ V

Resolution

Display 1 dB/0.01 μ V

Step size 1 dB

Accuracy

± 2 dB

± 3 dB (<-100 dBm)

SSB PHASE NOISE

-80 dBc/Hz at 20 kHz offset

SPURIOUS

Harmonics

-30 dBc

Non-Harmonics

-40 dBc (> ± 20 kHz offset from carrier) in Band

RESIDUAL FM

<60 Hz in 300 Hz to 3 kHz BW

Typically <20 Hz

RESIDUAL AM

<5% in 300 Hz to 3 kHz BW

Typically <1%

PORT INPUT PROTECTION

ANT port: +20 dBm

SWR port: +20 dBm

T/R port: +44 dBm

PORT VSWR

ANT port: <1.5 : 1

SWR port: <1.5 : 1

T/R port: <1.25 : 1

FM DEVIATION (GEN 1 AND GEN 2)

Modulation Frequency Rate

Range

0.0 Hz to 20.0 kHz

Resolution

0.1 Hz

Accuracy

Timebase ± 2 Hz

FM Modulation

Range

Off, 0 Hz to 100 kHz

Resolution

10 Hz

Accuracy

$\pm 10\%$ (2 kHz to 50 kHz deviation, 150 Hz to 5 kHz rate)

Typically <2% (5.6 kHz deviation, 1 kHz rate)

Total Harmonic Distortion

3% (1 kHz rate, >2 kHz deviation, 300 Hz - 3 kHz BP filter)

EXTERNAL FM

MIC IN

Input Range

Range 1: 2-15 mVrms (8 mVrms nominal) MIC E-OPEN, F-GND

Range 2: 35-350 mVrms(100 mVrms nominal) MIC E-GND, F-OPEN

Range 3: 2-32 mVrms (20 mVrms nominal) MIC E-OPEN, F-OPEN

Range 2 turns on a nominal 3 Vdc bias voltage

Frequency Range

300 Hz to 3 KHz

Deviation Range

Off, 0 Hz to 80 kHz

Modulation Accuracy

$\pm 20\%$ (300 Hz to 1.2 kHz)

$\pm 30\%$ (>1.2 kHz)

Slope

Positive voltage yields positive deviation

AUDIO IN

Switchable Loads

150 ohms, 600 ohms, 1 K ohms, DIV 10, High Z

Input Levels

0.05 to 3 Vrms

Frequency Range

300 Hz to 5 kHz

Level Sensitivity

1 kHz/35 mVrms

Slope

Positive voltage yields positive deviation

AM MODULATION (GEN 1 AND GEN 2)

Modulation Frequency Rate

Range

10.0 Hz to 20.0 KHz

Resolution

0.1 Hz

Accuracy

Timebase ± 2 Hz

AM Modulation

Range

OFF, 0 to 100%

Resolution

0.1%

Modulation Accuracy

10% off setting, 150 Hz to 5 kHz rate, 10% to 90% modulation

Total Harmonic Distortion

3% (20% to 90% mod, 1 kHz rate, 300 Hz to 3 kHz BP filter)

EXTERNAL AM

MIC IN

Input Range

Range 1: 2–15 mVrms (8 mVrms nominal) MIC E-OPEN, F-GND

Range 2: 35-350 mVrms (100 mVrms nominal) MIC E-GND, F-OPEN

Range 3: 2-32 mVrms (20 mVrms nominal) MIC E-OPEN, F-OPEN

Range 2 turns on a nominal 3 Vdc bias voltage

Frequency Range

300 Hz to 3 KHz

Modulation Range

Off, 0 Hz to 80 KHz

AUDIO IN

Switchable Loads

150 ohm, 600 ohms, 1 K ohms, DIV 10, High Z

Input Levels

0.05 to 3 Vrms

Frequency Range

300 Hz to 5 kHz

Level Sensitivity

1% / 35 mVrms nominal

AFGEN 1 AND AFGEN 2

FREQUENCY

Range

30 Hz to 5 kHz (spec)

0.0 Hz to 20.0 kHz (usable)

Resolution

0.1 Hz

Accuracy

Timebase ± 2 Hz

OUTPUT LEVEL

Range

0 to 1.57 Vrms (into 600 Ω)

Resolution

0.01 Vrms

Accuracy

$\pm 10\%$

Distortion

<3% (1 kHz rate, sine, 300 Hz to 3 kHz)

RF RECEIVER

FREQUENCY

Range

2 MHz to 1 GHz

Resolution

1 Hz

Accuracy

Same as timebase

INPUT AMPLITUDE

Minimum Input Level, Audio Sensitivity

ANT: -80 dBm (22.4 μ V), typical 10 dB SINAD (-110 dBm with pre-amp)

T/R: -40 dBm (2236 μ V), typical, 10 dB SINAD

Usable Input Level Range

ANT: -60 dBm (-80 dBm with RF Amp On) to -10 dBm (RF Error, Distortion, Modulation, AF Counter and AF Level)

ANT: -90 dBm (-110 dBm with RF Amp On) to -10 dBm (RSSI)

T/R: -20 dBm to maximum input level (RF error, Distortion, Modulation, AF Counter and AF Level)

T/R: -50 dBm to maximum input level (RSSI)

Maximum Input Level

ANT: +20 dBm/0.1 W for 10 seconds

T/R: +43 dBm/20 W (FM) and +37 dBm (AM)

AM/FM DEMODULATION

IF Bandwidth

FM: 5 kHz, 6.25 kHz, 8.33 kHz, 10 kHz, 12.5 kHz, 25 kHz, 30 kHz, 100 kHz, 300 kHz

AM: 5 kHz, 6.25 kHz, 8.33 kHz, 10 kHz, 12.5 kHz, 25 kHz, 30 kHz

Audio Filters Bandwidth

0.3-20 k BP, 0.3-5 k BP, 0.3-3 k BP, 0.3HP, CCITT BP, C-Wt BP, 15 K LP, 5 K LP, 3 K LP, 0.3 K LP

Audio Output Level Sensitivity

FM: (3 Vrms/kHz Dev)/IF BW (kHz) $\pm 15\%$

AM: 7 mVrms/% AM $\pm 15\%$

SPEAKER OUTPUT

75 dBa min. at 0.5 m, 600 - 1800 Hz, max volume

VOLUME CONTROL

Range

0 to 100

LO EMISSIONS

>-50 dBc

QUIETED CHANNELS

10 frequencies allowed between 2 MHz and 999.999 MHz quieted by no more than 30 dB RF TRANSMITTER TEST METERS

RF FREQUENCY ERROR METER

Range

± 200 kHz

Resolution

1 Hz

Accuracy

Same as timebase ± 2 Hz

RSSI INDICATOR (RF POWER WITHIN RECEIVER IF BANDWIDTH)

Display Range

dBm: -120 dBm to +43 dBm (+53 dBm with Ext Attn dB set to 20 dB)

Watts: 10 pW to 20 W (200 W with Ext Attn dB set to 20 dB)

Usable Meter Reading RF Level Range

T/R port: -50 dBm to +43 dBm

ANT port (without RF amp on): -90 dBm to -10 dBm

ANT port (with RF amp on): -110 dBm to -10 dBm

Resolution

0.01 dBm

Accuracy

±3 dB (>-50 dBm into T/R, >-90 dBm into ANT or >-120 dBm into ANT with RF Amp On)

RF POWER METER (BROADBAND RF POWER INTO T/R PORT)

Display Range

0 to 43 dBm (0 to 20 W)

Minimum Input Level

0.10 W/+20 dBm

Maximum Input Level

20 W/43 dBm for 10 minutes at +25° C or until thermal alarm sounds

Resolution

0.01 W/0.1 dBm

Accuracy

±1 dB

FM DEVIATION METER

Range

500 Hz to ±100 kHz

Modes

Peak+, Peak-, (Peak+ - Peak-)/2

Resolution

1 Hz

Accuracy

±10% of reading 500 Hz to 100 kHz Deviation

±5% 1 kHz to 10 kHz Deviation, 150 Hz and 1 kHz rate

AM PERCENT METER

Range

5% to 100%

Modes

Peak+, Peak-, (Peak+ - Peak-)/2

Resolution

1%

Accuracy

±5% of reading, 1 kHz rate, 30% to 90% modulation, 3 kHz LPF

ANT-CABLE TEST

Frequency Range

2.0 MHz to 1000.0 MHz

Span Range

10.0 MHz to 998 MHz

Start Range

2.0 MHz to 990.0 MHz

Stop Range

12.0 MHz to 1000.0 MHz

Frequency Resolution

0.1 MHz

Markers

3

Immunity to Interfering Signal

Typically -30 dBm

SWR MEASUREMENT

VSWR Range

1.00 to 20.00

Resolution

0.02

VSWR Accuracy

±10% of SWR readings (calibrated) <300 MHz

±20% of SWR readings (calibrated) =300 MHz

RETURN LOSS (RL) MEASUREMENT

Range

0.0 to -50.0 dB

Resolution

0.01 dB

CABLE LOSS MEASUREMENT

Range

0.0 to -50.0 dB

Resolution

0.01 dB

DTF MEASUREMENT

Measurement Range

3 ft to 328 ft

1 m to 100 m

Return Loss Range

0.0 to -50.0 dB

Cable types

USER, RG-8x, RG-8, RG-8foam, RG-8A, RG-55, RG-55A, RG-55B, RG-58, RG-58foam, RG-58A, RG-58B, RG-58C, RG-174, RG-213, RG-214, RG-223, RG-400

Velocity

0.00 to 1.00, automatically selected by cable type

Loss

0.00 to 100.00 dB per 100 ft, automatically selected by cable type

Est Length

39.4 ft to 420 ft

12 m to 128 m

AUDIO METERS

AUDIO INPUT (AUDIO IN)

Source

BNC Input on front panel

Frequency Range

300 Hz to 10 kHz

Level Range

0.2 Vp-p to 5 Vp-p

SINAD METER (WITH 1 KHZ AUDIO)

Measurement Sources

Audio in, demod

Audio Frequency

1 kHz

Display Range

0 to 40 dB

Resolution

0.1 dB

Accuracy

±1.5 dB from 8 to 40 dB

DISTORTION METER

Measurement Sources

Audio in, demod

Audio Frequency

1 kHz

Reading Range

0% to 100%

Resolution

0.1%

Accuracy

±10% from 1% to 20%

AUDIO FREQUENCY COUNTER

Range Demod

FM

15 Hz to 20 kHz (IF BW set appropriately for received modulation BW)

AM

100 Hz to 10 kHz (IF BW set appropriately for received modulation BW)

Range Audio Input

15 Hz to 20 kHz

Audio Input Level

10 mV p-p to 5 V p-p

Resolution

0.1 Hz

Accuracy

± 1 Hz

AUDIO FREQUENCY LEVEL METER

Measurement Sources

AUDIO IN, DVM

Frequency Range

200 Hz to <5 kHz

Input Level

AUDIO IN 10 mV rms to 3 V rms (x1)

1 V rms to 30 V rms (÷10)

DVM 10 mV rms to 3 V rms (x1)

1 V rms to 30 V rms (÷20)

Display Unit Resolution

Volts 0.001 V

mV 0.001 mV

dBuV 0.001 dBuV

dBm 0.001 dBm

Watts 0.001W

Accuracy

±5% Audio In

ANALYZER (OPTIONAL)

FREQUENCY

Range

2 MHz to 1 GHz

Resolution

1 Hz

Accuracy

Same as timebase

Span

10 kHz to 5 MHz in 1,2,5 sequence

EFFECTIVE RBW

Range

19 Hz to 25 kHz (Effective RBW calculated based on FFT window type and Span)

POWER BANDWIDTH

Offset Range

0 to +/- 2.495 MHz

Bandwidth Range

1 kHz to 5 MHz in a 1,2,5 sequence (maximum bandwidth is the selected span)

Power Bandwidth Display Range

-137 dBm to +43 dBm

Power Bandwidth Display Resolution

0.001 dBm

Power Bandwidth Accuracy

±3 dB (>-50 dBm into T/R, > -90 dBm into ANT or > -110 dBm into ANT with RF Amp On)

Displayed Average Noise Level (DANL)

-120 dBm (Typical, 10 kHz span) -136 dBm with pre-amp enabled

Sweep time

700 ms (Typical)

OSCILLOSCOPE (OPTIONAL)

Source

DVM, Audio In, Demod

Traces

One

Markers

Two

Trigger

Type

Auto, Norm

Edge

Rising, Falling

Level

-100 to +100 V

Horizontal

Range

0.5 ms/div to 0.1 sec/div

Accuracy

3% of full scale

Vertical

Range

FM demod

0.1 kHz to 50 kHz/div in a 1, 2, 5 sequence

AM demod

5, 10, 20, 50%/div

DVM and Audio in

10 mV to 10 V/div in a 1, 2, 5 sequence

Accuracy

10% of full scale

Coupling:

DVM Input: AC, DC and GND

AUDIO IN: AC

Input Impedance

DVM Input: 1 M Ω

AUDIO IN: 150 Ω , 600 Ω , 1 K Ω , High Z, Div by 10

Bandwidth

5 kHz

TIMEBASE

Temperature Stability

± 0.25 ppm at 25°C

± 0.5 ppm over temp range

Aging

1 ppm/year standard

Warm-up time

3 min.

ENVIRONMENTAL / PHYSICAL

Overall Dimensions

231 mm x 285 mm x 70 mm (W x L x D)

9.1 in. x 11.2 in. x 2.8 in.

Weight

8 lbs. (3.6 kg); 12 lbs. (5.4 kg) with accessories and softbag

Temperature

Storage: -51°C to +71°C storage

Note: Battery must not be subjected to temperatures below -20° C, nor above +60° C

Operation: -20°C to +55°C

Note: Battery to be charged at temperatures between 0°C and +45°C

Humidity

95% max. (non-condensing) (MIL-PRF-28800F Class 2)

Altitude

4,600 m max. (15,092 ft.) (MIL-PRF-28800F Class 2)

Shock, Functional

30G (MIL-PRF-28800F Class 2)

Vibration

Random 10 - 500 Hz (MIL-PRF-28800F Class 2)

Bench Handling

MIL-PRF-288000F, Class 2

COMPLIANCE

ENVIRONMENTAL

Use

Pollution degree 2

Mil-PRF-28800F class 2

Salt fog

Splash proof

Acoustic noise

Explosive atmosphere

Fungus resistance

Dust resistance

Drip proof

Solar radiation

EMC

Emissions

Mil-PRF-28800F

EN61326: 1998 class A

EN61000-3-2

EN61000-3-3

Immunity

Mil-PRF-28800F

EN61326: 1998

EN61000-6-1

SAFETY

Standard

UL 61010-1

Usage Environment

Indoor use, maximum relative humidity 80% for temperatures up to 31°C decreasing linearly to 50% RH at +40°C, Installation Category II, Pollution degree 2

AC INPUT POWER (AC TO DC CONVERTER / CHARGER UNIT)

AC Input Voltage Range

100 to 240 VAC, 1.5 A max., 47 Hz - 63 Hz

AC Input Voltage Fluctuation

Less than 10% of the nominal input voltage

Transient Overvoltage

According to Installation Category II

Usage Environment

Indoor use, maximum relative humidity 80% for temperatures up to 31°C decreasing linearly to 50% RH at +40°C, Installation Category II, Pollution degree 2

Operating Temperature

0°C to +40°C

Storage Temperature

-20°C to + 85°C

EMI

EN55022 class B, EN61000-3-2 class D

Safety

UL 1950, CSA 22.2 No. 234 and No.950, IEC 950/EN 60950

DC INPUT POWER

DC Input Voltage Range (DC INPUT CONNECTOR)

11 VDC to 32 VDC

DC Power Input, Max. (DC INPUT CONNECTOR)

55 W

DC Power Input, Nominal (DC INPUT CONNECTOR)

25 W

DC Fuse Requirement (DC INPUT CONNECTOR)

5A, 32VDC, Type F

BATTERY

Battery Type

Lithium Ion (Li Ion) battery pack

Note: Battery must not be subjected to temperatures below -20°C , nor above +60°C

Battery Operation Time

5 hours continuous use

No backlight, duty cycle 80% transmitter and 20% Receiver tests, Auto shutoff if key is not pressed for 10 minutes

7 hours typical use

Battery Charge Time

4 hours

Note: Battery to be charged at temperatures between +0°C and +45°C only

DIRECTIONAL COUPLER

Coupling

30 dB

Frequency Range

20 MHz to 200 MHz

Power Rating

250 W CW

Insertion Loss

0.25 dB Max.

VSWR

1.10:1 Max.

Flatness

+/- 0.5 dB Max.

Directivity

20 dB Min

Connectors

RF In: Type N

RF Out: Type N

FWD: BNC

REV: BNC

Kit Includes

Coupler (Werlatone Model: C1569-13)

2 BNC cables (12 in)

2 Adapters (N-F to BNC-F)

1 10 dB attenuator

20 db/50 W ATTENUATOR

Attenuator Type

Bi-Directional

DC - 18 GHz

Power Rating

(mounted horizontally): 50 watts average (bi-directional) to 25°C ambient temperature, derated linearly to 10 Watts @ 125°C. 1 kW peak (5 µsec pulse width; 2.5% duty cycle).

Maximum deviation over frequency

+ /- 0.75 dB

Maximum SWR

1.15

Kit Includes

20 dB/50 W attenuator

N-F, BNC-F adapter

TNC-M, N-M adapter

20 db/150 W ATTENUATOR

Attenuator Type

Uni-Directional

DC - 1.5 GHz

Power Rating

(mounted horizontally with fins vertical): 150 watts average (unidirectional) to 55°C ambient temperature, derated linearly to 10% @ 125°C.

Maximum deviation over frequency

± 0.50 dB

Maximum SWR

1.10

Kit Includes

20 dB/150 W attenuator

N-F, BNC-F adapter

N-M, BNC-F adapter

P25 FUNCTIONS

- C4FM modulation fidelity
- C4FM frequency error
- Power
- Tx BER
- STD 1011, 0.153 CAL generator for BER

VERSIONS, OPTIONS AND ACCESSORIES

When ordering please quote the full ordering number information.

Ordering Numbers	Description
------------------	-------------

3500A	Portable Radio Test Set
3500AUK	Portable Radio Test Set plus upgrade kit

3500A SUPPLIED ACCESSORIES

Case, Soft -Sided Carrying

External DC Power Supply

Power Cable (AC)

Handset

Short-Open-Load VSWR Calibrator

Comm Breakout Box

Cable (TNC) (M-M) (48 in)

2 X Cable (BNC) (M-M) (48 in)

5 X Adapter (BNC-F to TNC-M)

2 X Fuse, Spare (5 A, 32 Vdc, Type F)

Case, Accessory

Power Cable (DC cigarette lighter)

Getting Started Manual (Paper)

Operation/ICW Manual (CD)

Antenna (BNC) (50 MHz)

Antenna (BNC) (150 MHz)

Antenna (BNC) (450 MHz)

Antenna (BNC) (800 MHz)

Flash Drive, 1 GB USB

3500AUK ADDITIONAL SUPPLIED ACCESSORIES

Flip Cover

Attenuator (20 dB / 50 W)

Adapter (N-M to TNC-M)

2 X Adapter (N-F to BNC-F)

Attenuator (20 dB / 150 W)

Adapter (N-M to BNC-F)

Options

35XX0PT01	Spectrum Analyzer
35XX0PT02	Oscilloscope
35XXOPT07	P25 Test
35XXOPT08	Tracking Generator

Optional Accessories

AC number	Description
AC27002	Attenuator (20 dB / 50 W), Adapter (N-F to BNC-F), Adapter (N-M to TNC-M)
AC27003	Attenuator (20 dB / 150 W), Adapter (N-F to BNC-F), Adapter (N-M to BNC-F)
AC27013	Directional Coupler (20 to 200 MHz), 2 X Adapter (N-M to BNC-F), Attenuator (10 dB), 2 X Cable (BNC) (M-M) (16 in)
AC27005	Battery, Spare
AC27001	Case, Transit
AC27006	Flip Cover
AC27009	CD Maintenance Manual (CD)
AC0820	Desk Top Stand
AC0826	Tripod
AC24006	Tripod, Dolly, Stand
AC25055	QMA Adapter Kit (Includes 24 assorted adapters)
AC25056	4 ft Blue Streak QMA to QMA Quick Connect Cable
AC25057	AC25055 + AC25056 Combo

CHINA Beijing

Tel: [+86] (10) 6539 1166
Fax: [+86] (10) 6539 1778

CHINA Shanghai

Tel: [+86] (21) 5109 5128
Fax: [+86] (21) 6457 7668

FINLAND

Tel: [+358] (9) 2709 5541
Fax: [+358] (9) 804 2441

FRANCE

Tel: [+33] 1 60 79 96 00
Fax: [+33] 1 60 77 69 22

GERMANY

Tel: [+49] 8131 2926-0
Fax: [+49] 8131 2926-130

HONG KONG

Tel: [+852] 2832 7988
Fax: [+852] 2834 5364

INDIA

Tel: [+91] (0) 80 4115 4501
Fax: [+91] (0) 80 4115 4502

JAPAN

Tel: [+81] 3 3500 5591
Fax: [+81] 3 3500 5592

KOREA

Tel: [+82] (2) 3424 2719
Fax: [+82] (2) 3424 8620

SCANDINAVIA

Tel: [+45] 9614 0045
Fax: [+45] 9614 0047

SPAIN

Tel: [+34] (91) 640 11 34
Fax: [+34] (91) 640 06 40

UK Cambridge

Tel: [+44] (0) 1763 262277
Fax: [+44] (0) 1763 285353

UK Stevenage

Tel: [+44] (0) 1438 742200
Fax: [+44] (0) 1438 727601
Freephone: 0800 282388

USA

Tel: [+1] (316) 522 4981
Fax: [+1] (316) 522 1360
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2010.

www.aeroflex.com
info-test@eroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.