

# TERMINATIONS

Type N, up to 18 GHz, 50 Watts

## SPECIFICATIONS:

Models: TNXXXM-50W, TNXXXF-50W

**RoHS**  
Compliant


**AEROFLEX**  
A passion for performance.

### Electrical:

Frequency Range \_\_\_\_\_ DC - 18 GHz  
 Standard Freq. Values \_\_\_\_\_ 6, 12.4 & 18 GHz  
 VSWR  
 DC - 6 GHz \_\_\_\_\_ 1.25:1 Max.  
 6 - 12.4 GHz \_\_\_\_\_ 1.35:1 Max.  
 12.4 - 18 GHz \_\_\_\_\_ 1.45:1 Max.  
 Impedance \_\_\_\_\_ 50 Ohms  
 Input Power \_\_\_\_\_ 50 Watts Avg. @ +25°C  
Derated Linearly to 10 Watts @ +125°C  
 Peak Power \_\_\_\_\_ 500 Watts Max.  
(5uSec Pulse, .05% Duty Cycle)  
 Operating Temp Range \_\_\_\_\_ -65°C to +125°C

### Mechanical:

Type N Connectors \_\_\_\_\_ Passivated Stainless Steel  
Mates with MILSTD-348  
 Housing \_\_\_\_\_ Anodized Aluminum  
 Conductors \_\_\_\_\_ Gold Plated Beryllium Copper

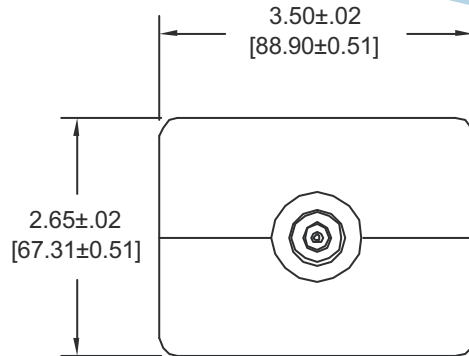


END VIEW  
TYPICAL

Model Number: **TNXXXF-50W**

Type N Female Connector  
 Length: 3.82 ±.05 [97.0 ±1.3]  
 As Pictured

Model Number: **TNXXXM-50W**

Type N Male Connector  
 Length: 3.74 ±0.5 [95.0 1.3]

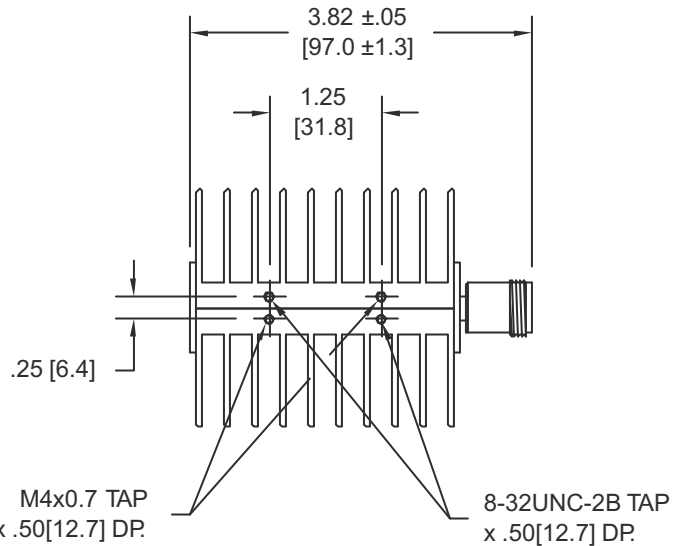

Units must be Mounted in such a way as to Allow for Free Air Flow Around fins to Insure Performance

## HOW TO ORDER:

Model Number: **TNXXXV-50W**

Frequency Range  Connector Configuration  
 060 = DC - 6 GHz M = Male  
 120 = DC - 12.4 GHz F = Female  
 180 = DC - 18 GHz

### Ordering Examples:

Model Number: **TN120M-50W**  
 DC - 12.4 GHz; Type N Male

Model Number: **TN060F-50W**  
 DC - 6 GHz; Type N Female

Model Number: **TN180M-50W**  
 DC - 18 GHz; Type N Male

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

TN 180-50W: REV H



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.  
 888-244-6638 or 734-426-5553 • FAX: 734-426-5557  
 www.aeroflex.com/inmet • inmet@aeroflex.com