


CS19

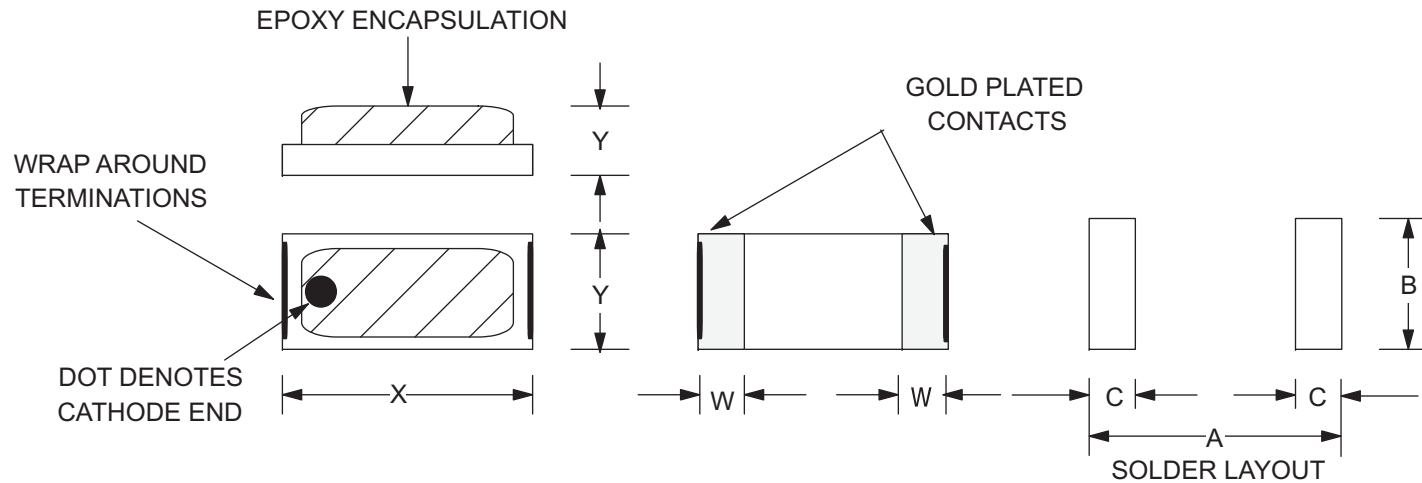

PKG STYLE	DIMENSIONS				SOLDER LAYOUT (TYP.)			PACKAGE CP AND LP
	W DIM.	X DIM.	Y DIM.	Z DIM.	A	B	C	
CS19-1	12 (.304)	60 (1.52)	40 (1.01)	30 (.762)	72 (1.83)	40 (1.52)	20 (.508)	.06 pF .4 nH
CS19-2	12 (.304)	75 (1.91)	50 (1.27)	35 (.889)	87 (2.21)	70 (1.78)	20 (.508)	.07 pF .4 nH
CS19-3	12 (.304)	100 (2.54)	50 (1.27)	35 (.889)	112 (2.84)	70 (1.78)	20 (.508)	.08 pF .5 nH
CS19-4	12 (.304)	120 (3.05)	60 (1.52)	35 (.889)	132 (3.35)	80 (2.03)	20 (.508)	.09 pF .6 nH
CS19-5	12 (.304)	200 (5.08)	100 (2.54)	35 (.889)	212 (5.38)	120 (3.05)	20 (.508)	.10 pF .6 nH
CS19-6	10 (.254)	40 (1.01)	20 (.508)	30 (.762)	50 (1.27)	30 (.762)	15 (.381)	.05 pF .4 nH
CS19-7	10 (.254)	60 (1.52)	20 (.508)	30 (.762)	70 (1.78)	30 (.762)	15 (.381)	.06 pF .4 nH
TOL. ±	2.0 (.051)	3.0 (.076)	3.0 (.076)	MAX.	NOM.	NOM.	NOM.	NOM.

Dimensions inches [mm]