

Model 1W General Purpose Attenuator

dc to 4.0 GHz
2 Watts

Low Cost, Type N




CONNECTORS: Type N (male/female) connectors - mate nondestructively with MIL-C-39012 connectors.

CONSTRUCTION: Nickel-plated brass body and connectors, gold plated Beryllium contacts

WEIGHT: 65 g (2.5 oz) maximum

PHYSICAL DIMENSIONS:

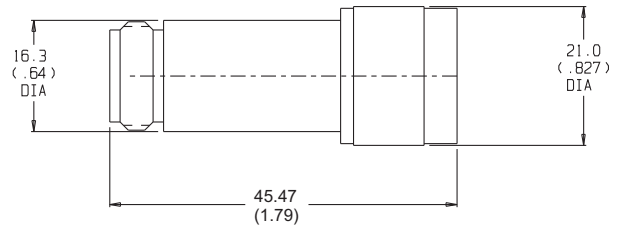

Features

- /// **Attenuation Values from 1 to 10, 20 dB.**
- /// **Low Cost**
- /// **Wireless Applications** - Optimized for use in the wireless communications bands.

Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: dc to 4.0 GHz

MAXIMUM DEVIATION OVER FREQUENCY:	
Nominal ATTN (dB)	Deviation (dB)
1 -6	± 0.30
7 -10, 20	± 0.50

MAXIMUM SWR:	
Frequency (GHz)	SWR
dc - 8.0	1.25

POWER RATING: 2 watts **average** to 25°C ambient temperature, derated linearly to 0.5 watts @ 105°C. 250 watts **peak** (5 μsec pulse width; 0.4% duty cycle).

POWER COEFFICIENT: < 0.005 dB/dB/watt

TEMPERATURE COEFFICIENT: < 0.0004 dB/dB/°C

TEMPERATURE RANGE: -20°C to +105°C.

NOTE:

1. All dimensions are given in mm (inches) and are maximum, unless otherwise specified.
2. Unit available with RoHS compliant materials, specify when ordering.

MODEL NUMBER DESCRIPTION:

Example:

