

## Model 1426 Medium Power Coaxial Termination

dc to 8.5 GHz  
50 Watts



Convection Cooled



### Features


- /// **Rugged Construction** - Quality connector with special high temperature support bead.
- /// **Low Intermodulation Option**
- /// **5 Kilowatts Peak Power**

### Specifications

**NOMINAL IMPEDANCE:** 50 Ω

**FREQUENCY RANGE:** dc to 8.5 GHz

MAXIMUM SWR:	
Frequency (GHz)	SWR
dc - 4	1.20
4 - 8.5	1.30

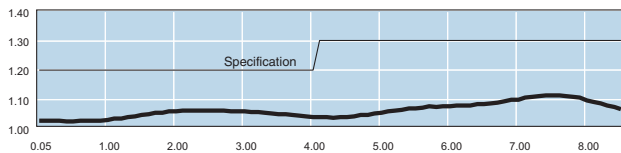

Typical 1426-4 SWR Performance

**POWER RATING:** 50 watts **average (mounted horizontally)** to 25°C ambient temperature, derated linearly to 0 watts @ 125°C. 5 kilowatts **peak** (5 μsec pulse width; 0.05% duty cycle).

**INTERMODULATION (Model 1426-X-LIM Only):** IM3 (Reflected) = -100 dBc with two input signals @ 869 MHz and 891 MHz with an average power of +41 dBm each.

**TEMPERATURE RANGE:** -55°C to +125°C

**TEST DATA:** SWR Testing performed across the frequency band. Test data is available at additional cost.


**CONNECTOR:** Type N connector per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connector. Choice of male (-4) or female connector (-3).

2.92mm connector mates nondestructively with SMA per MIL-C-39012, 3.5mm and other 2.92mm (SMK) connector. Choice of male (-2) or female connector (-1).

**CONSTRUCTION:** Black, finned aluminum body, stainless steel connector; gold plated beryllium copper female contacts and stainless steel male contacts.

**WEIGHT:** Net 280 g (10 oz.)

### PHYSICAL DIMENSIONS:

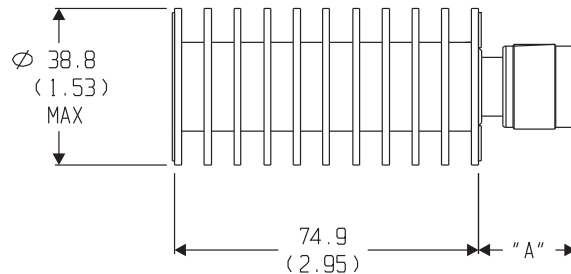


Model #	DIM A	Connector Type
1426-1	12.7 (0.50)	2.92mm female
1426-2	14.0 (0.55)	2.92mm male
1426-3	15.0 (0.59)	N female
1426-4	22.9 (0.90)	N male

### NOTE:

- All dimensions are given in mm (inches) and are maximum, unless otherwise specified.
- Unit available with RoHS compliant materials, specify when ordering.

### MODEL NUMBER DESCRIPTION:

Example:

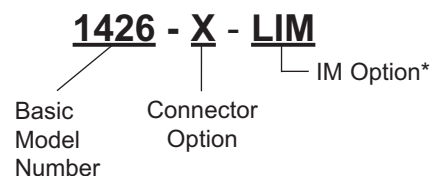

\* Add -LIM to entire model number for Low Intermodulation option. Option not available through Express.