


Model 1432 High Power Coaxial Termination

dc to 8.5 GHz
150 Watts

RoHS

Convection Cooled



Features

- /// **Flexible Mounting Position** - The units may be mounted in horizontal (fins up) or vertical position.
- /// **Rugged Construction** - Quality connector with special high temperature support bead.


Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: dc to 8.5 GHz

MAXIMUM SWR:	
Frequency (GHz)	SWR
dc - 4	1.20
4 - 8.5	1.30

PHYSICAL DIMENSIONS:

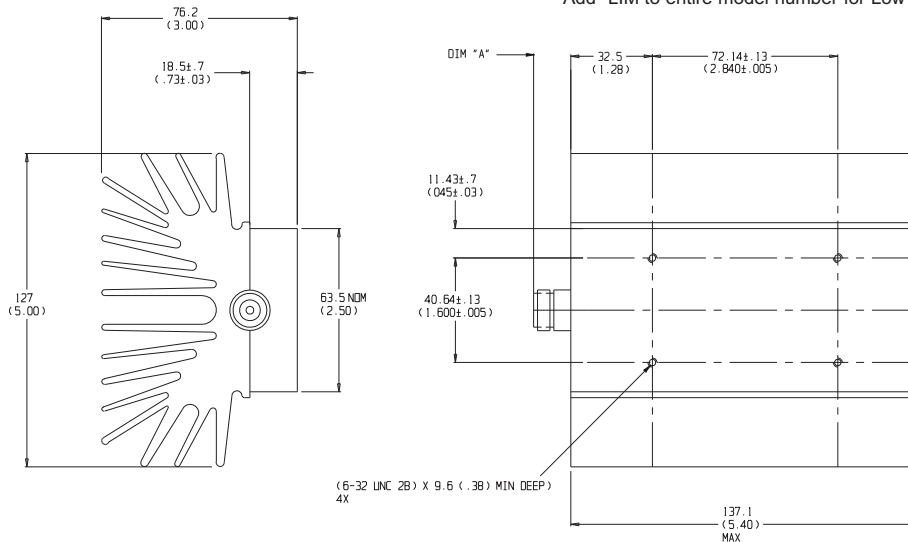

NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.

INTERMODULATION (Model 1432-X-LIM Only): IM3 (Reflected) = -100 dBc with two input signals @ 869 MHz and 891 MHz with an average power of +43 dBm each.

POWER RATING: 150 watts average (mounted horizontally or vertically assuming unobstructed air flow and natural convection around unit) to 25°C ambient temperature, derated linearly to 15 watts @ 125°C. 5 kilowatts peak (5 μsec pulse width; 1.5% duty cycle).

TEMPERATURE RANGE: -55°C to +125°C

TEST DATA: SWR Testing performed across the frequency band. Test data is available at additional cost.


CONNECTOR: Type N connector per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connector. Choice of male (-4) or female (-3) connector.

CONSTRUCTION: Black, finned aluminum body, stainless steel connector; gold plated beryllium copper female contacts and stainless steel male contacts.

WEIGHT: 1,450g (3 lbs., 3 oz.)

MODEL NUMBER DESCRIPTION:

Example:

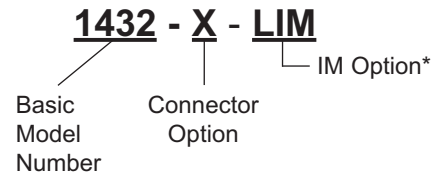

* Add -LIM to entire model number for Low Intermodulation option.

Model #	DIM A	Connector Type
1432-3	15.0 (0.59)	N female
1432-4	22.9 (0.90)	N male