




# Cable Modem Testing (75Ω) & VoIP Testing Subsystems

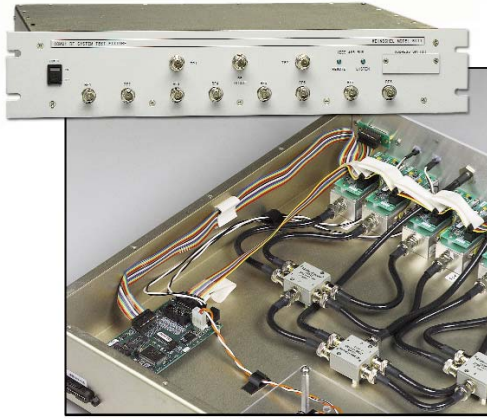

## Mechanical Layout:

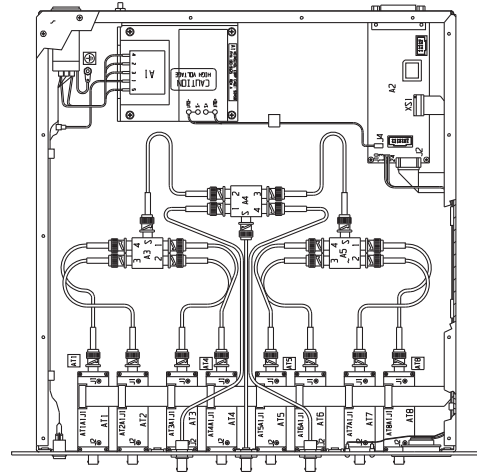

- /// 800-1900 MHz frequency range
- /// 8 Input Channels to 1 Output Channel
- /// IEEE-488 Interface
- /// Wide Dynamic Range: 63/1 dB steps, 75Ω
- /// Aeroflex / Weinschel 3250T Programmable Attenuators with built-in driver circuitry.



## Simplified Block Diagram:

