

Model 1433 High Power Coaxial Termination

dc to 5.0 GHz
250 Watts

RoHS

Convection Cooled



Features

- /// **Compact Construction** - Lowest size/power ratio.
- /// **Low SWR** - Maximum SWR remains low through full frequency and power range.
- /// **Operates down to dc.**
- /// **Rugged Construction** - Quality connector with special high temperature support beads.

Specifications

NOMINAL IMPEDANCE: 50 Ω
FREQUENCY RANGE: dc to 5.0 GHz

MAXIMUM SWR:	
Frequency (GHz)	SWR
dc - 2	1.10
2 - 5	1.15

INTERMODULATION (Model 1433-X-LIM Only): IM3 (Reflected) = -100 dBc with two input signals @ 869 MHz and 891 MHz with an average power of +43 dBm each.

POWER RATING: 250 watts **average** (mounted horizontally assuming unobstructed air flow and natural convection around unit) @ 25°C ambient temperature, derated linearly to 25 watts @ 125°C. 10 kilowatts **peak** (5 μsec pulse width; 2.5% duty cycle).

TEMPERATURE RANGE: -55°C to +125°C

TEST DATA: SWR Testing performed across the frequency band. Test data is available at additional cost.


CONNECTOR: Type N connector per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connector. Choice of male (-4) or female connector (-3).

CONSTRUCTION: Black, finned aluminum body, stainless steel connector; gold plated beryllium copper female contact or stainless steel male contact.


WEIGHT: Net 1,530 g (3 lbs., 6 oz.) maximum

MODEL NUMBER DESCRIPTION:

Example:

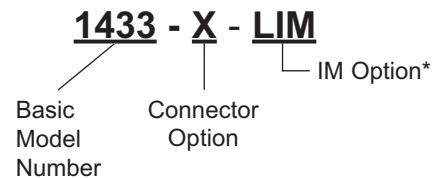

PHYSICAL DIMENSIONS:

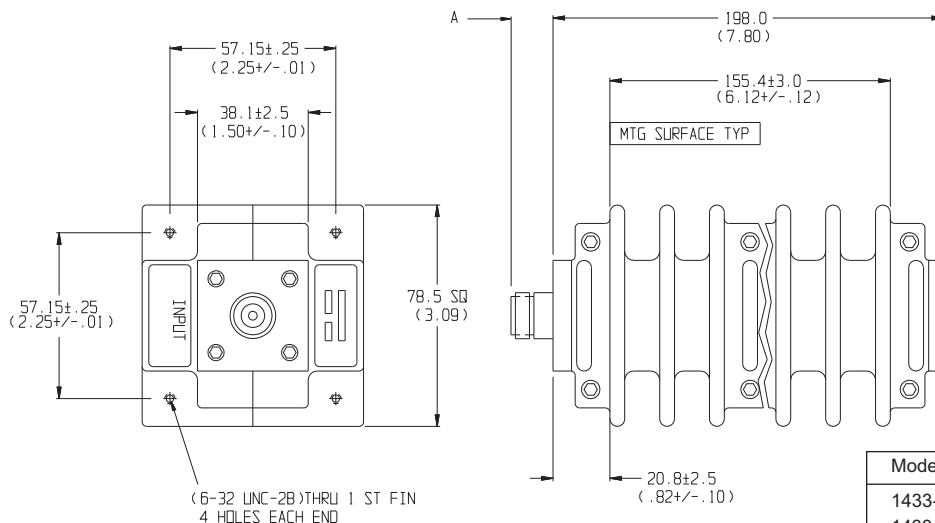

NOTE:

1. All dimensions are given in mm (inches) and are maximum, unless otherwise specified.
2. Unit available with RoHS compliant materials, specify when ordering.

Model #	DIM A	Connector Type
1433-3	15.0 (0.59)	N female
1433-4	22.9 (0.90)	N male