

Model 81 High Power Fixed Coaxial Attenuator

dc to 10.0 GHz
500 Watts

Conduction/Convection Cooled



Features

- Quality connectors with special high temperature support beads.
- Designed to meet environmental requirements of MIL-DTL-3933.

Specifications

NOMINAL IMPEDANCE: 50 Ω
FREQUENCY RANGE: dc to 10.0 GHz

MAXIMUM DEVIATION OVER FREQUENCY (dB):		
NOM ATTN (dB)	Deviation	
	dc - 7.0 GHz	7.0 - 10.0 GHz
10, 20, 30, 40	±3.0	+5 / -0 dB

MAXIMUM SWR:	
Frequency (GHz)	SWR
dc - 9.0	1.50
9.0 - 10.0	1.90

POWER RATING (assuming unobstructed air flow and natural convection around unit): 500 watts **average (unidirectional)** to 35°C ambient temperature, derated linearly to 50 watts @ 125°C. 5 kilowatt **peak** (5 μsec pulse width; 0.5% duty cycle). Maximum power into output is 20 Watts **average**.

POWER COEFFICIENT: <0.0001 dB/dB/Watt
TEMPERATURE COEFFICIENT: <0.0004 dB/dB/°C
TEMPERATURE RANGE: -55°C to +125°C

TEST DATA: Insertion Loss and SWR Test data supplied at 0.05, 2.0, 4.0, 6.0, 8.0 and 10 GHz. Other test data can be provided at additional cost.


CONNECTOR: Type N connectors - mate nondestructively with MIL-C-39012 connectors .

Options	Type/Description
3	Type N, Female
4	Type N, Male

CONSTRUCTION: Black, finned aluminum body, stainless steel or silver plated brass connectors with gold plated beryllium copper or stainless steel N male contacts.

WEIGHT: 10 dB: 5.3 kg (11 lbs, 11 oz) maximum
20, 30, 40 dB: 6.24 Kg (13 lbs, 12 oz) maximum

PHYSICAL DIMENSIONS:

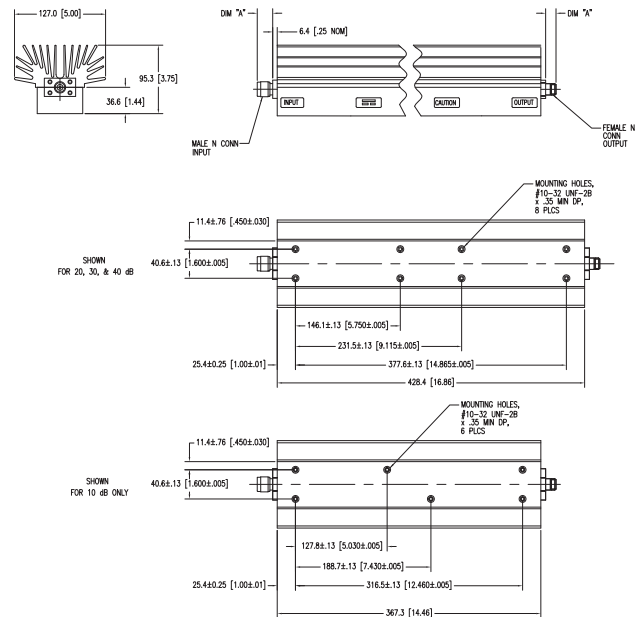

Connector Type	DIM A
N female	15.0 (0.59)
N male	22.9 (0.90)

NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.

MODEL NUMBER DESCRIPTION:

