


Model 1437RA Model RS3016 Subminiature Coaxial Terminations

dc to 6.0 GHz / 2 Watts
dc to 18.0 GHz / 1Watt

Low Cost, SMA Connector

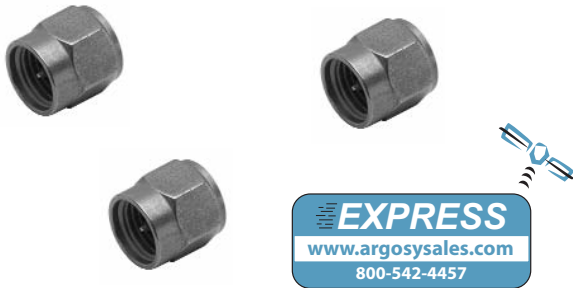

Features

- /// Subminiature Size and Lightweight
- /// Low Cost & SWR
- /// Cellular Applications: Optimized for use in the wireless communications bands.

Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: M/F1437RA: dc to 6.0 GHz
RS3016: dc to 18.0 GHz

POWER RATING:

Model 1437RA: 2.0 watts **average** @ 25°C ambient temperature, derated linearly to 0.5 watts @ 125°C. 250 watts **peak** maximum (5 μsec pulse width; 0.05% duty cycle).

Model RS3016: 1.0 watts **average** @ 25°C ambient temperature, derated linearly to 0 watts @ 125°C. 250 watts **peak** maximum (5 μsec pulse width; 0.05% duty cycle).

MAXIMUM SWR:		
Frequency Range (GHz)	1437RA	RS3016
dc - 4	1.05	1.05
4 - 8 (6)	1.10	1.10
8 - 12.4	---	1.15
12.4 - 18	---	1.20

TEMPERATURE RANGE: -65°C to +125°C


CONNECTOR: **Model 1437RA:** SMA connectors - mate nondestructively with MIL-C-39012 connectors. Choice of male or female connector, prefix model number with M for male and F for female. **Model RS3016** available in SMA male only!

CONSTRUCTION: Passivated stainless steel connectors with gold plated beryllium copper contacts.


WEIGHT: M1437RA: 3.0 g (0.11 oz)
F1437RA: 4.0 g (0.14 oz)
RS3016: 2.3 g (0.08 oz)

PHYSICAL DIMENSIONS:


Model F1437RA:

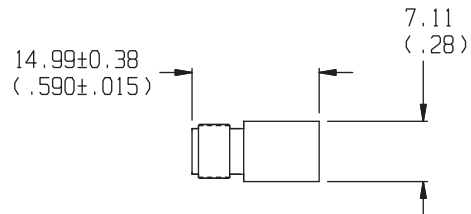

Model M1437RA:

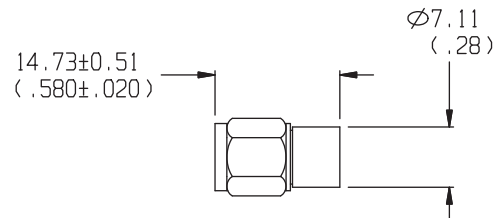

Model RS3016 (male only):



NOTE:

1. All dimensions are given in mm (inches) and are maximum, unless otherwise specified.
2. RS3016 available with RoHS compliant materials, specify when ordering.