

Signal Sources

Option 12 SINAD Measurement (2023A/B, 2025)



Option 12 further enhances the versatility of the 2023A/B, 2025 range providing a complete receiver sensitivity test solution in an economical, space saving package.

- High performance SINAD measurement
- 50 dB measurement range
- Accurate DSP based CMESS, CCITT P53 and un-weighted filters
- RS-232 and GPIB control
- User selectable measurement averaging
- Simple menu set up
- Over/under range indication

Option 12 provides the user with a high performance SINAD measurement function which can be used for receiver testing in development, production and servicing.

The SINAD function can be used independently of the signal source as a genuine second instrument. Alternatively the SINAD measurement can be operated with the source in manual or automatic control of RF level mode.

Simple Operation

Set up of the measurement selections from a utility menu ensures simple and fast operation.


```
■ Util 49 --- SINAD Measurement
■ Average: 22 --- (1 - 127)
■ Weighting Filter: 2 - C-MESS
  0: Unweighted 1: CCITT 2: C-MESS
■ SINAD: 1 - Enabled
  0: Disable 1: Enable 2: AUTO
```

2023A/B and 2025 simultaneously displays the signal RF source parameters and the SINAD measurement result. The user is able to manually control the source amplitude and frequency and see at a glance the resulting SINAD. Input level over range and under range warning messages confirm valid measurement values.

```
Carr Freq 850.000 000 MHz
RF Lev1 -115.0 dBm ON FM1 ~ ON
SINAD 20.0 dB FM2 ~ OFF
C-MESS
```

Automatic RF Level Coupled Operation

An automatic RF level adjustment mode to achieve a user defined SINAD value for a receiver under test is available for even simpler bench operation. In this mode the RF level is automatically reduced from a pre-set level until the measured SINAD value matches the user input value.



Weighting Filters


SINAD measurements can be made un-weighted or through accurate and stable DSP based CMESSAGE or CCITT P53 psophometric weighting filters.

Result Averaging


A user selectable result averaging function in the range 1-127 can be applied to the displayed SINAD result.

Instrument Stores

The extensive volatile and non-volatile storage facilities on 2023A/B and 2025 are available for use with Option 12 SINAD to simplify repetitive test sequences for manual or GPIB operation.

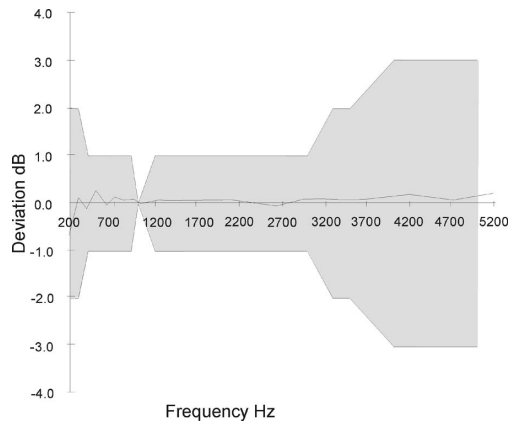

Filter response compared to CMESSAGE standard error band

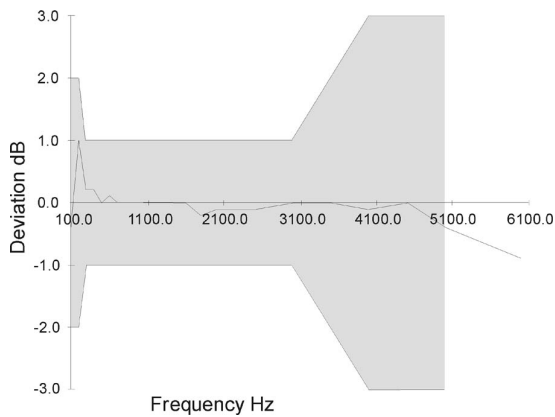

Filter response compared to CCITT standard error band

SPECIFICATION

GENERAL DESCRIPTION

This option provides an independent high performance SINAD measurement function featuring 50 dB SINAD measurement range, with automatic over/under range indication, user selectable weighting filters and result averaging. An automatic generator level seek mode from a user SINAD input value is included. Available with all existing 2023A/B and 2025 family options.

MEASUREMENT RANGE

50 dB

ACCURACY

± 0.5 dB

DISPLAY

Resolution

0.01 dB

Averaging

User selectable result averaging from

1-127 measurements - Default setting is 5 measurements.

Over/under range indication

Automatic display warning when input signal level is out of range.

INPUT SIGNAL

Weighting Filters

Selectable CMESS, CCITT P53 weighted measurement filters or un-weighted measurement (50 Hz - 7.0 kHz 3 dB bandwidth)

Modulation Frequency

1 kHz ± 20 Hz notch filter range

Sensitivity

50 mV RMS - 3.0 V RMS (250 mV RMS for 50 dB SINAD). Max. safe input level ± 15 V

Input impedance

100 k Ω (nominal)

Input Connectivity

SINAD baseband input is via front panel Ext Mod Input connector, (MOD I/O connector when option 7 or 11 are fitted).

VERSIONS AND ACCESSORIES

When ordering please quote the full ordering number information.

Ordering Numbers

Versions

2023A	9 kHz to 1.2 GHz Signal Generator
2023B	9 kHz to 2.05 GHz Signal Generator
2025	9 kHz to 2.51 GHz Signal Generator

Options

Option 1	No attenuator (not available with option 3, 7 or 11)
Option 2	DC operation
Option 3	High power (not available with option 1, 7 or 11)
Option 4	High stability frequency standard
Option 5	Rear panel outputs
Option 7	Fast Pulse Modulator (not available with option 1, 3 or 11)
Option 10	Mod input sensitivity 1 V Pk
Option 11	Fast Pulse Modulator with High Power (not available with options 1,3 or 7)
Option 12	SINAD Measurement

Supplied with

	AC power supply lead
46882/373	Operating Manual
43130/119	DC supply lead (option 2 only)

Accessories

46880/088	Service manual
46884/792	Front bracket handle mounting kit
46662/601	Transit case
46662/602	Soft carry case
46884/650	RS-232 cable, 9-way female to 9-way female, 1.5m
43129/189	1m GPIB lead
59000/317	VISA Plug 'n' Play driver software (also available as a download from www.ifrsys.com)

CHINA Beijing

Tel: [+86] (10) 6467 2761 2716
Fax: [+86] (10) 6467 2821

CHINA Shanghai

Tel: [+86] (21) 6282 8001
Fax: [+86] (21) 62828 8002

FINLAND

Tel: [+358] (9) 2709 5541
Fax: [+358] (9) 804 2441

FRANCE

Tel: [+33] 1 60 79 96 00
Fax: [+33] 1 60 77 69 22

GERMANY

Tel: [+49] 8131 2926-0
Fax: [+49] 8131 2926-130

HONG KONG

Tel: [+852] 2832 7988
Fax: [+852] 2834 5364

INDIA

Tel: [+91] 80 5115 4501
Fax: [+91] 80 5115 4502

KOREA

Tel: [+82] (2) 3424 2719
Fax: [+82] (2) 3424 8620

SCANDINAVIA

Tel: [+45] 9614 0045
Fax: [+45] 9614 0047

SPAIN

Tel: [+34] (91) 640 11 34
Fax: [+34] (91) 640 06 40

UK Burnham

Tel: [+44] (0) 1682 604455
Fax: [+44] (0) 1682 662017

UK Stevenage

Tel: [+44] (0) 1438 742200
Fax: [+44] (0) 1438 727601
Freephone: 0800 282388

USA

Tel: [+1] (316) 522 4981
Fax: [+1] (316) 522 1360
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2004.

www.aeroflex.com
info-test@eroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.