

## Phase Trimmer Broadband

**PV-18**


CAES Broadband Phase Trimmer offers mechanically variable continuous phase change.

**Part Number PV-18**



Specification	Limit	Units
Frequency Range	1-18	GHz
Phase Shift	20, min/25, typ (@ 1 GHz) 360, min/450, typ (@18 GHz)	degrees
Phase Adjustment	12, min	turns
Insertion Loss	1 dB, max (1 - 8 GHz) 1.5 dB, max (8 - 18 GHz)	dB
VSWR	1.5:1, max (1 - 8 GHz) 1.9:1, max (8 - 18 GHz)	
CW Power (operating)	3, max	W
Peak Power (operating)	3, max (1.03 GHz; 1 $\mu$ s PW; 1% DC)	kW
Temperature Range (operating)	-55 to +85	$^{\circ}$ C
Connectors	SMA female	
Adjustment Mechanism	#1 Cross recess	
Monotonicity	Guaranteed	

Mechanical layout

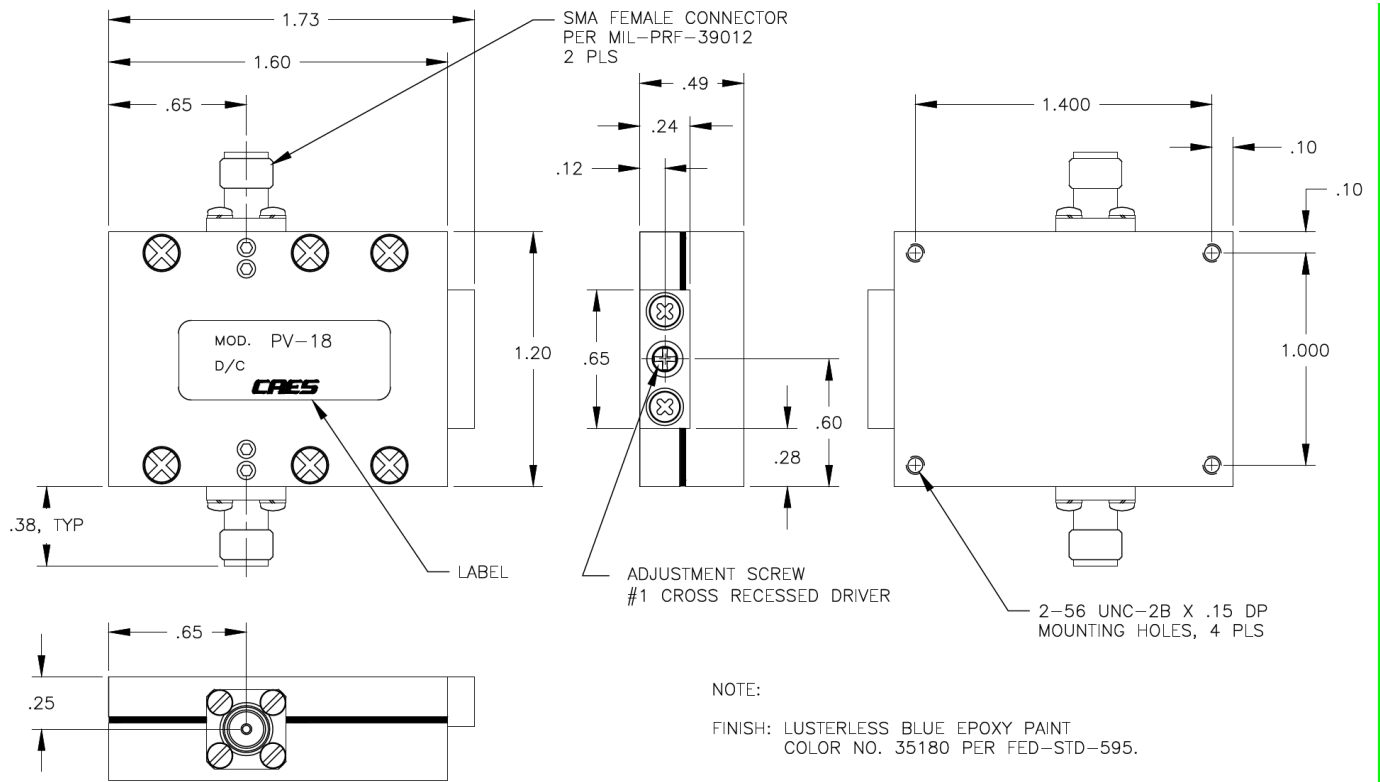

NOTE:

CAES New Jersey Inc. d/b/a Cobham Advanced Electronic Solutions (CAES) reserves the right to make changes to any products and services described herein at any time without notice. Consult an authorized sales representative to verify that the information in this data sheet is current before using this product. The company does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing; nor does the purchase, lease, or use of a product or service convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of the company or of third parties.