


MEST²G-150-20

PIN DIODE SWITCH ELEMENT



(CM26)
non-hermetic
Bolt Down Package



Description

The MEST²G-150-020-CM26 is a Thermal to Ground Series diode Switch Element in a bolt down Copper package. This part is designed for reliable high power switch application up to 150 watts. Usable up to 10 GHz.

Features

- Low Insertion Loss: 0.25 dB typical at 2.0 GHz
0.40 dB typical at 6.0 GHz
- Medium Isolation: 21 dB typical at 2.0 GHz
12 dB typical at 6.0 GHz
- High Power Handling 150 watts

Maximum Ratings

RATING	LIMITS	UNITS
V_R	500	V
I_{FDC}	250	mA
θ_{JC}	8	°C/W
T_J	-40 to +175	°C
T_{STG}	-55 to +150	°C
T_{SOLDER}	+260 °C per JEDEC STD-J-20C	


Electrical Characteristics, $T_C = +25\text{ °C}$

SYMBOL	TEST CONDITIONS		MIN	TYPICAL	MAX	UNITS
V_{BR}	$I_R = 10\ \mu\text{A}$		500	–	–	V
V_F	$I_F = 50\ \text{mA}$		–	–	1850	mV
R_S	$I_F = 100\ \text{mA}$	2 Diodes F = 500 MHz	–	1.8	–	Ω
Cj	$V_R = -50\ \text{V}$	1 Diode F = 1 MHz	–	0.19	–	pF
τ	$I_F = 10\ \text{mA}$	$I_R = 6\ \text{mA}$ measured at 50%	–	1800	–	ns
IRL / ORL	$I_F = 100\ \text{mA}$	F < 2.0 GHz	25	30	–	dB
		F < 6.0 GHz	13	15	–	dB
I_L	$I_F = 100\ \text{mA}$	F < 2.0 GHz	–	0.25	0.40	dB
		F < 6.0 GHz	–	0.40	0.60	dB
I_S	$V_R = -10\ \text{V}$	F < 2.0 GHz	18.0	21	–	dB
		F < 6.0 GHz	10.0	12.0	–	dB




Typical RF Performance at 25° C Ambient, -10 dBm Small Signal


Insertion Loss

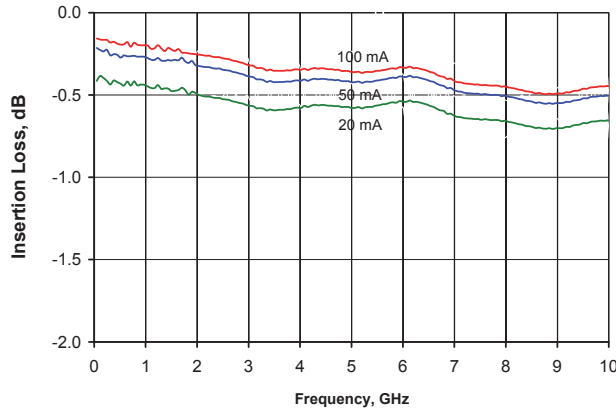


Isolation

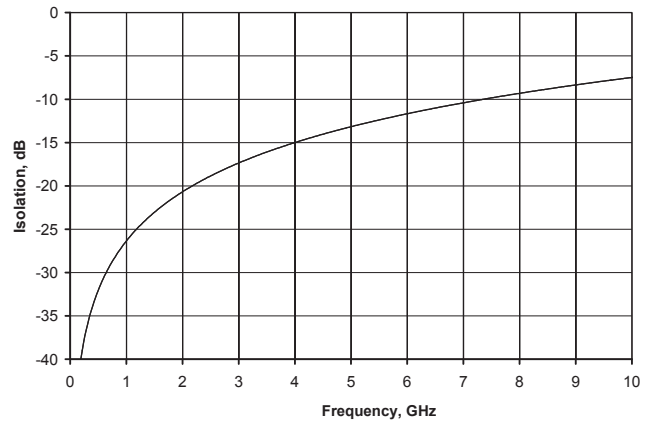

Input Return Loss

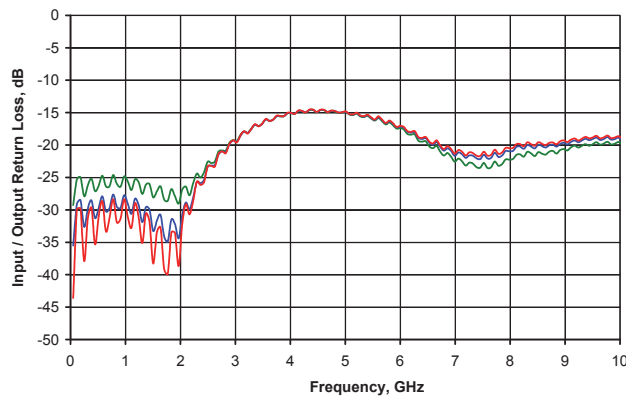


Resistance vs Bias Current, 500 MHz For Two Diodes in Series

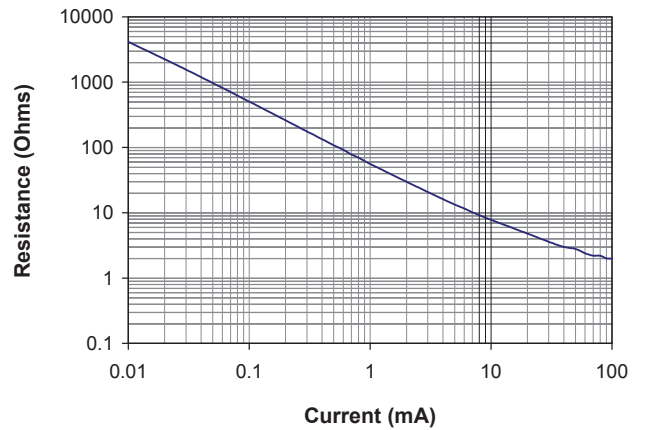

MEST²G-150-20



Package Outline (CM26)

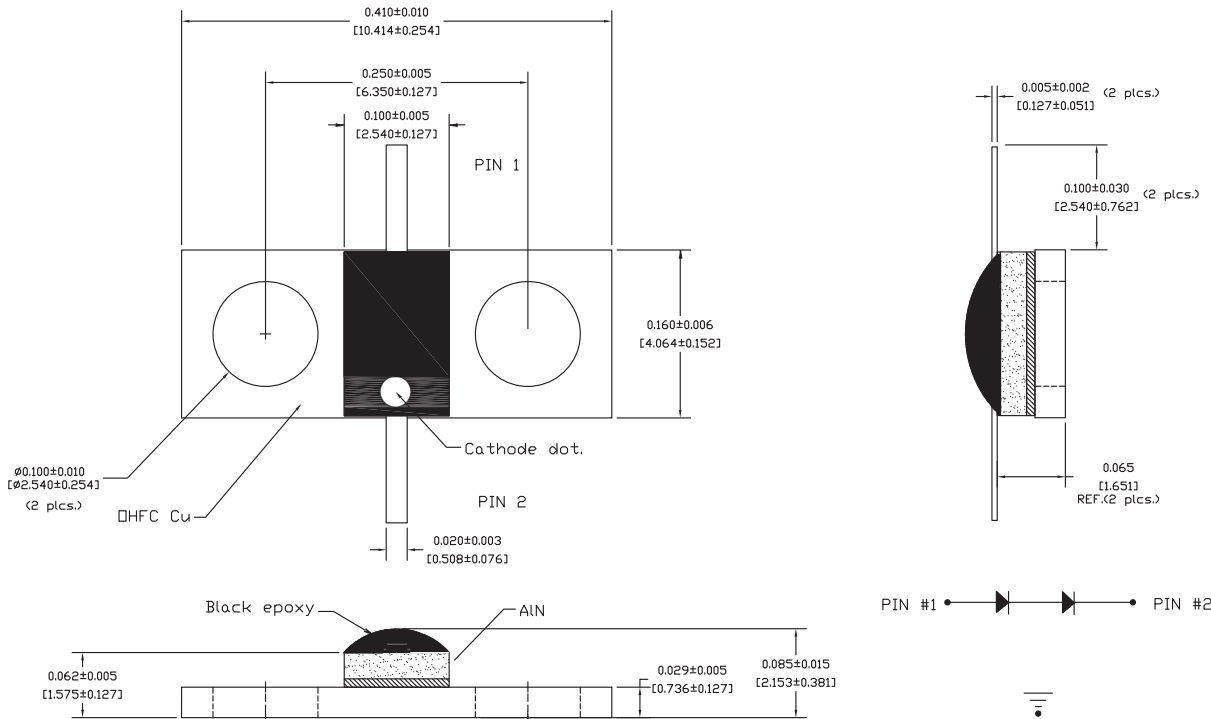


NOTES:

Finishes:

1. 50μ Min. of Gold over 50μ Min. of Nickel.

Dimensions in mils [mm]

Junction Temperature vs Input Power Mounted on Heat Sink 25°C Ambient, 1.3 GHz

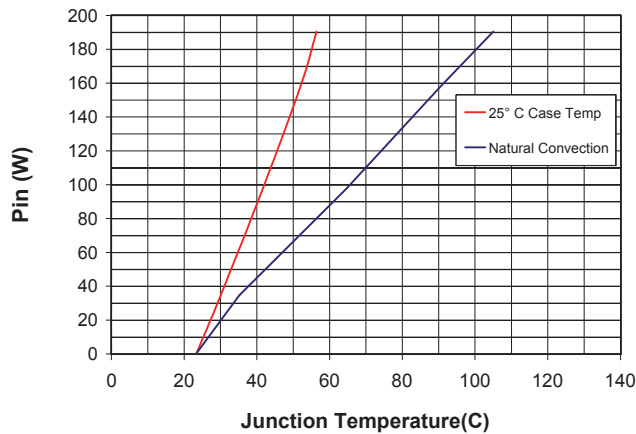

Aeroflex / Metelics Inc.

Aeroflex Microelectronic Solutions
975 Stewart Drive
Sunnyvale, CA 94085
TEL: 408-737-8181

54 Grenier Field Road
Londonderry, NH 03053
TEL: 603-641-3800

Sales

888-641-SEMI (7364)
metelics-sales@aeroflex.com

www.aeroflex.com/Microwave www.aeroflex.com/Metelics

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2011 Aeroflex / Metelics. All rights reserved.

ISO 9001:2008 certified companies



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.